


Assembly Instructions: 9903-12 (Autumn Twilight)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

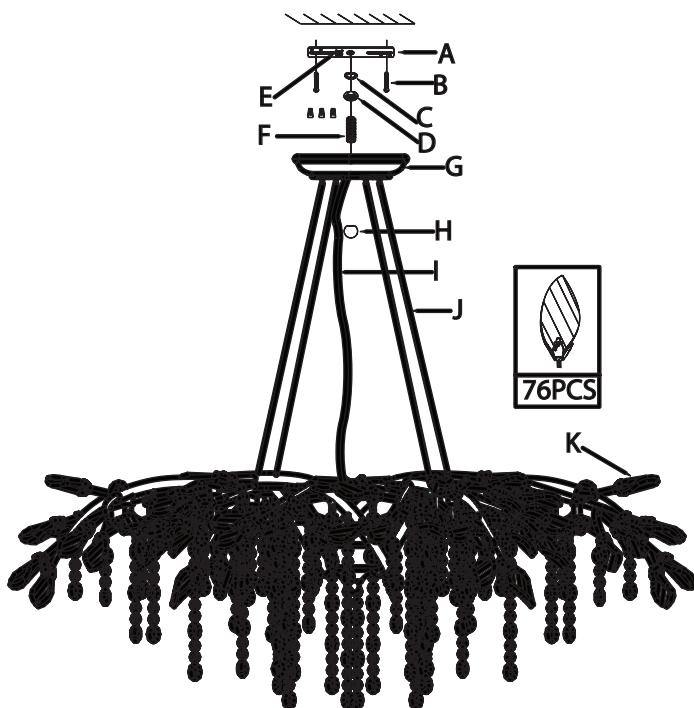

CONNECTING THE WIRES

4. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

PREPARING FOR INSTALLATION


Carefully remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

1. From the parts bag remove the mounting strap assembly. One end of threaded rod (F) should be attached to mounting strap (A) with washer (C) and hex nut (D) in place.
2. Pull the house wires through the center of mounting strap (A). Place mounting strap (A) over the junction box and secure in place with mounting screws (B) and a screwdriver. Tighten the screws securely.

ASSEMBLING THE FIXTURE

3. Measure to determine the correct length of cable wires needed for proper hanging height. To shorten the fixture, trim the wires to the desired length plus at least 8 to 10 inches. Put the fixture's wire through the hole in the side of canopy (G).

How to Identify the Fixture's Wires		
Hot	Neutral	Ground
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread
Black	White	
Black Inner Thread	White Inner Thread	

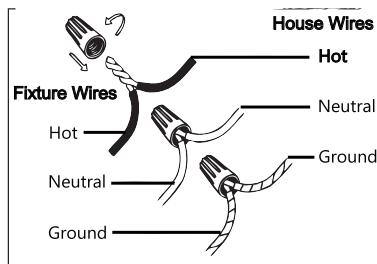

FINISHING THE INSTALLATION

5. Push canopy (G) up to the ceiling so that threaded rod (F) protrudes through the hole in canopy (G). Secure canopy (G) to the ceiling by threading decorative nut (H) onto threaded rod (F).
6. Install the crystals. To properly install crystals leaves (K), flip the page and refer to the attached crystal diagram.
7. Install light bulbs (not provided) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is now complete. Turn on the power and test the fixture.


CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture. Dry with a lint-free or microfiber cloth.

Assembly Instructions: 9903-12 (Autumn Twilight) - cont.

CRYSTAL DIAGRAM

Screw crystal leaves (K) onto the empty screw posts on the fixture body. Refer to the diagram below which demonstrates how to properly hold crystal leaves (K). Hold the crystals carefully by the metal base to prevent the crystals from cracking or breaking. The crystal beads are tied up in bags on the fixture body. Carefully tear open the bags and arrange the strings of beads.

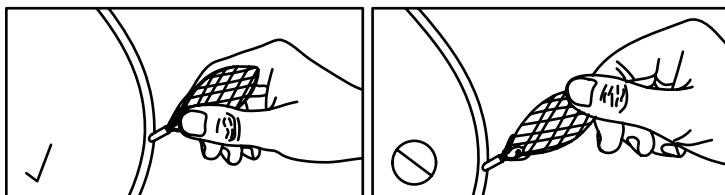

9903-12	A X11	B X13	C X10	D X9
A-- PT-CRYSTAL-9903-2B				
B-- PT-CRYSTAL-9903-3B				
C-- PT-CRYSTAL-9903-4B				
D-- PT-CRYSTAL-9903-5B				

